


Mounting instruction, car blanket „Bridge“

Packing content

This car blanket prevents slipping of a dog into the floor area behind the front seats. Through the stiffening-plates (position 5), which are inserted into the blanket, the floor area behind the front seats is bridged. This is a much larger additional space for the animal.


Pos.	Name	piece
1.	blanket	1
2.	long straps	2
3.	short straps	4
4.	hooks	2
5.	stiffening plate	2



Mounting of the blanket




Bring the blanket into the vehicle and tighten the straps and the buckles on the headrests of the front seats. Connect the Straps (located under the blanket) with the hook below the front seats.

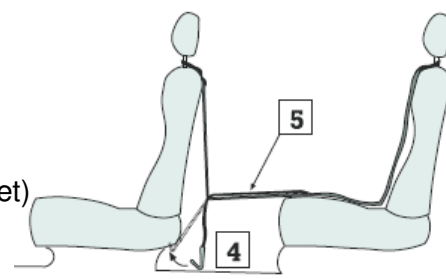

Attention! Slipping off hooks may cause risk of injury. Do not fasten on cable or wires!


The blanket can be also fixed to the headrests of the back seats.



If the car blanket is too long, the blanket can be reduced on the backseats rolling by approximately 20 cm. After the blanket was rolled up inside, the short straps (position 3) can be pushed through the eyelets and locked.

The long straps (position 2) are needed to fix the blanket to the bars of the rear headrests.

If the blanket is too wide, or if the stiffening plates press on the rear doors, the stiffening plates should be reduced. For this purpose use a wood saw or a very good stable carpet knife.

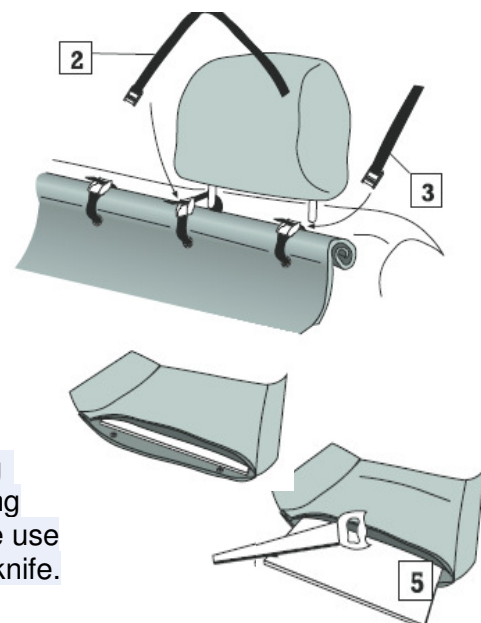

Note:

if the blanket is not needed, it can easily be folded and fastened behind the front seats. In this case the storage pockets with Velcro closure, for storing utensils can also be used (back of the blanket)

Mounting instruction, car blanket „Bridge“

If there are none of the above described mounting options on the back seat, use the following options:

Car with folding rear seat:

wrap one to be ordered separately (order address and order number; see below right, order no.50005300) long strap (L=1.80 m) around the rear seat. Thread one end then from the front through the mounting hole of the blanket so that the clamping device is below the blanket.

Fastening with metal plates

(to be ordered separately): screw the metaltang into the inner lining of your car, to fasten the blanket with the supplied straps.



Look for safe installation and check for wiring harnesses behind it and head airbags!

Care instruction

The blanket can be cleaned with water and soap suds. Because the stiffening plates are not water-resistant, they must be removed before cleaning.

name

order no.

Car blanket "Bridge"	50999000
optional accessories (to order separately):	
2 pieces metaltang, screws	50005100
2 pieces metaltang, screws; 2 pcs.	
straps L=50 cm	5000200
strap L=1.80 m	5000300